

4T Four Post Base Model Hoist

The Tecalemit 4 tonne four post electro/hydraulic hoists come in three variants. The standard base model, large and wheel alignment specific models provide you with the options best suited for your workshop.

The TECG440 and TECG440L share the same core features. The TECG440W is supplied with front turning plate locations and rear slip plates with extra-long platforms suited for wheel alignment duties.



Four Post
Hoist



Lift Time



Lifting
Capacity





TECG440

tecalemmit.com.au



TECALEMIT
lubrication and workshop equipment

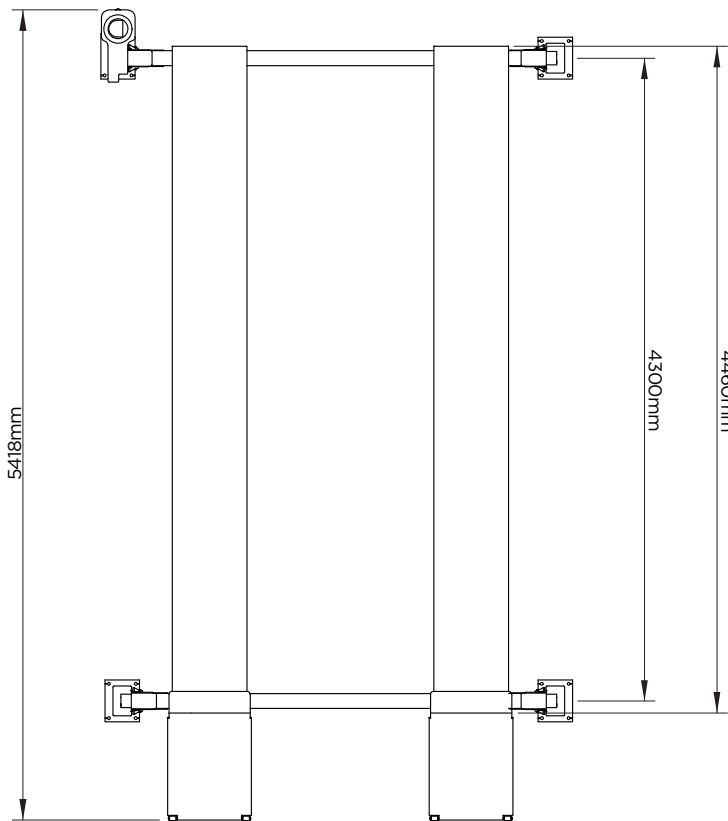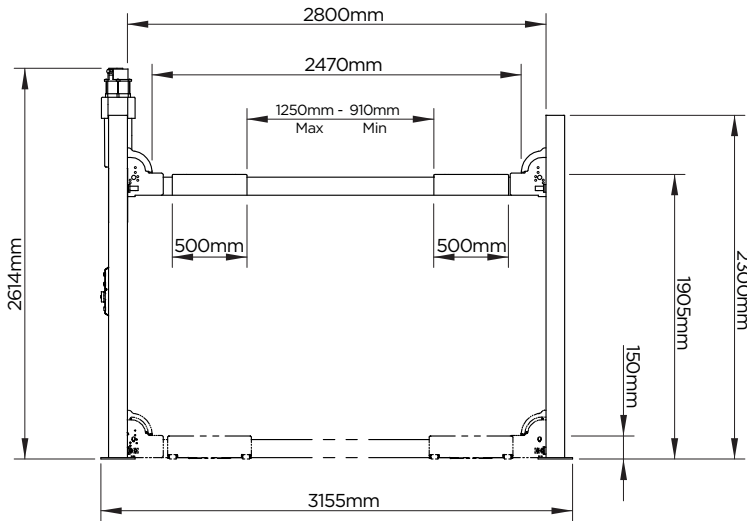

For complete dimensions and installation procedure please refer to the product manual.

Vehicle Hoist Features

- Hydraulic cylinder located inside the fixed platform.
- High-resistant, galvanised and pre-stretched metal cables with large-diameter pulleys and self-lubricating, maintenance-free bushes.
- Automatic mechanical back-up safety devices (every 100mm) with pneumatic release allowing stationary operation with unladen cables and immediate-triggering safety stud devices in case a cable slackens or fails.
- Automatic anti-toe trap alarm during final stages of lift descent.
- Mechanical, electrical & hydraulic safety devices along with low-voltage (24V) electrical system with control circuit.

Hoist Specifications

Lifting Capacity	4000kg
Maximum Lift Height	1905mm
Lowered Platform Height	150mm
Overall Dimensions	5418mm long, 3155mm wide, 2614mm high
Inside Column Width	2800mm
Width Between Platforms	910mm minimum, 1250mm maximum
Platform Width	500mm
Power	400V 50Hz 2.6kw
Lift Time	35 seconds

Spare Parts Support

Tecalemit stock a comprehensive supply of spare parts for all our hoists to ensure minimal downtime. With experienced staff on-hand to offer technical advice on all aspects, from hoist selection, installation, operation and on-going service and maintenance.