

# MagiX 35 LSMG

Electro-hydraulic mobile short-rise scissor lift, 3.5 t capacity



## Application

- ☐ Repair and maintenance
- ☐ Tyre change

## Description:

- ☐ Double hydraulic system with 2 cylinders under each scissor section, therefore no compressed air and no safety ratchet necessary
- ☐ Mobile control column with push buttons, integrated pump unit and alarm signal
- ☐ Mechanic synchronization through cross-bars
- ☐ Emergency lowering valves can manually be opened
- ☐ Sturdy scissor construction for high directional stability
- ☐ Ramps and platforms made of tear plates, for easy drive-on, also with wet wheels
- ☐ Base frames, platforms and ramps galvanized as standard
- ☐ Low minimum height for good drive-over situation
- ☐ Mobile-kit in standard scope of delivery, consisting of: rollers and lever for moving of the scissor lift
- ☐ Rubber blocks 1 set = 4 pcs, H=40 mm included in scope of delivery

## Standard colours:

- ☐ Platforms & ramps: galvanized
- ☐ Scissors: RAL 7016 – grey

## Versions:

- ☐ Available with different voltages

## Optional extras:

- ☐ Set of expansion bolts
- ☐ Set rubber blocks, 20, 40, 60, 70, 80 and 100 mm



Scan the QR-Code  
for detailed product information.

Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)

#### AUTOPSTENHOJ GmbH

Sandkampstraße 90  
D-48432 Rheine

+49 5971 8602-02

info@autopstenhoj.com

#### AUTOPSTENHOJ GmbH

Barrit Langgade 188-190

DK-7150 Barrit

+45 76 82 13 30








info@autopstenhoj.com

#### Technical data

Lifting capacity	3,500 kg
Lifting height	855 mm
Working height	960 mm + Rubber pads
Lifting / lowering time	20 sec.
Pump unit	2.2 kW
Voltage	3Ph - 230/400V – 50 / 60 Hz

#### Scissor platforms

Platform length	1,400 – 1,974 mm
Platform width	480 mm
Distance between platforms	1,000 mm
Min. height	105 mm
Depth of recess	0 mm

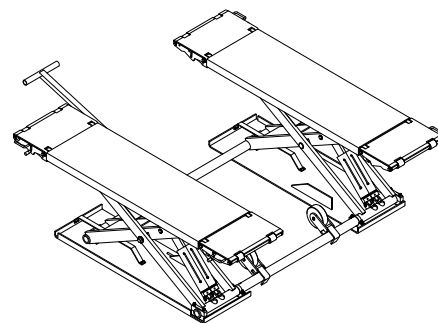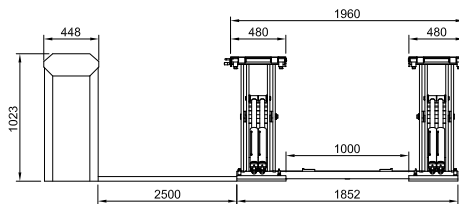

Double hydraulic system, therefore  
no compressed air required



Mobile-kit for moving the lift



Stable, galvanized ramps made of  
tear plate, for a better drive-on  
situation, even in damp conditions