

Maestro 2.32

Electro-mechanical 2-post lift, 3.2 t capacity



Application

- ☐ Repair and maintenance

Approvals / recommendations

- ☐ Renault

Description:

Posts:

- ☐ Asymmetric post installation
- ☐ Very stable welded posts
- ☐ Without base frame
- ☐ Two motors
- ☐ Cold-rolled spindle
- ☐ Nylon nut sets
- ☐ Carriage with 6 guiding wheels and lubrication-free roller bearings
- ☐ Pushbutton control unit with alarm signal
- ☐ Programmable top stop
- ☐ Electronic synchronization

Arms:

- ☐ Single telescopic front and rear arms, as standard
- ☐ Possibility of parallel parking of arms
- ☐ Internal arm locking system
- ☐ Low minimum height

Standard colours:

- ☐ Arms: RAL 3020 – red
- ☐ Posts: RAL 7016 – grey

Versions:

- ☐ Available with different voltages
- ☐ F = flex pad
- ☐ CF-08 = combiflex 08 pad

Optional extras:

- ☐ Available with 2 different portal heights; alternatively in-ground kit
- ☐ LED-lighting set
- ☐ Power pack
- ☐ Set of expansion bolts
- ☐ Extra control unit
- ☐ Long door stops
- ☐ Wheel holders
- ☐ Extension set for 2.35 F
- ☐ Large program of extra pads

Special colours available on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GmbH

Sandkampstraße 90
D-48432 Rheine

☎ +49 5971 8602-02

✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit

☎ +45 76 82 13 30


✉ info@autopstenhoj.com

Technische Daten

Lifting capacity	3,200 kg
Lifting height	1,900 mm
Working height	1,995 – 2,150 mm
Lifting / lowering time	approx. 40 sec.
Motor	2 x 1.5 kW
Voltage	3 x 230 / 400V – 50 Hz – 35 / 25 A

Arm superstructure

Lifting pad included in the delivery	F: 777395 (25 – 55 mm) CF-08: 777395 (25 – 180 mm)
Min. height	95 mm
Drive-through width	2,120 – 2,320 mm
Width between posts	2,380 – 2,580 mm
Total width - outer edges posts	2,960 - 3,160 mm
Total width - outer edges base plates	3,120 - 3,320 mm
Total height post	2,713 mm
Total height incl. portal	4,050 / 4,350 mm
Arm length front, min. - max.	F Std: 540 – 850 mm F DT: 480 – 840 mm
Arm length rear, min. - max.	F Std1: 900 – 1,425 mm F Std2: 800 – 1,250 mm

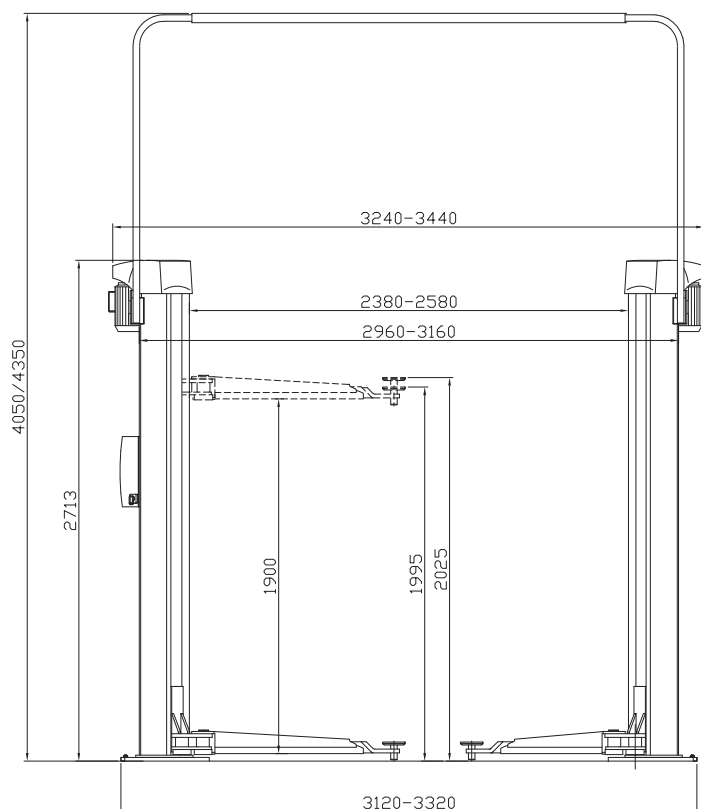

CF-pad / CF-08 pad / F-pad



Stable, welded post